BLACKVIEW

User manual V2.0

BLACKVIEW

Thank you for purchasing BlackView.BlackView is a portable, Stylish, high-performance vehicle drive recorder. It has 5.0M effective pixel high-definition CMOS image sensor, intelligent voice reminder, enhanced night shooting,140°wide-angle lens.
Specific performance parameters are as follows:

CMOS sensor	5,000,000 pixels
Viewing angle of lens	Wide-angle 140°
Turning angle of lens	200° back and forth
Screen	2.0TFT high resolution
Quality vedio	HD(1280×720)@30 fps
Night vision	Enhanced night vision
Format of picture	JPEG
Pixel of picture	2560x1920
Voice guidance	intelligent voice guidance
Type of memory card	TF card
Capacity of memory Card	Supports up to 32G
Battery	800MA Polymer lithium battery
Power consumption	150MA

Checking the packing content

Check the product and the accompanied accessories

- If there is any problem of the accessories, contact your local product distributor.

BlackView

Support Slot

User mnaual

Cable holders

Power cable

Driver disk

Checking the main body of the BlackView

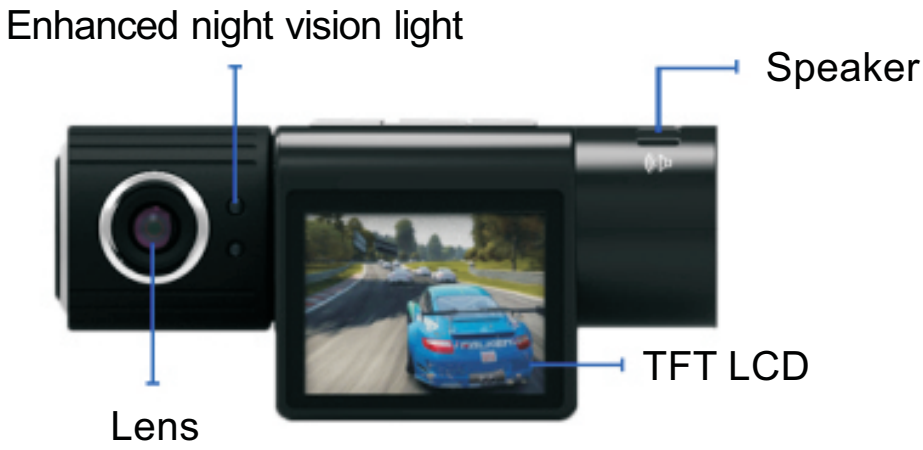

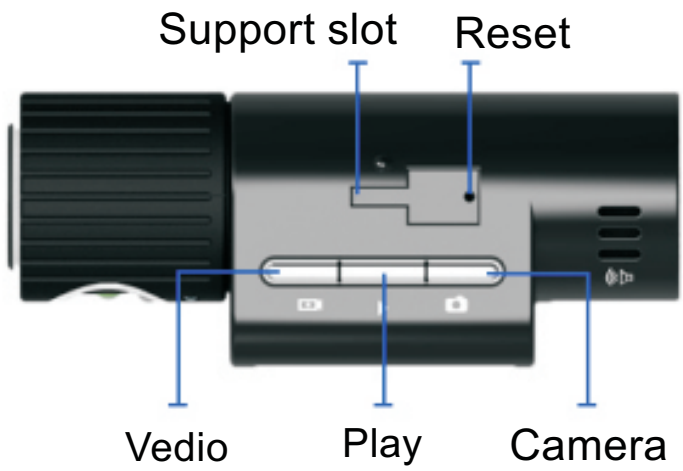

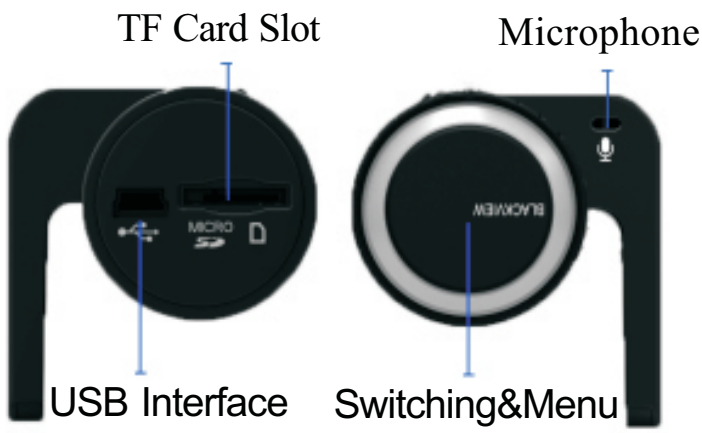

Installing the BlackView

1.Stop the engine and remove the key from the ignition.

- Install the BlackView in a well-lit and safe location.

2.Insert the Micro SD card into the BlackView.

3.Attach the BlackView into the windshield of your car using double-sided tape.

- Use a soft and dry cloth to wipe the foreign material and moisture attached in the surface of the support slot.

4.Connect the [USB] terminal of the BlackView and the cigarette jack of your car using the power cable.

5.Tie the power cable

- Use the provided cable holder, when necessary.

6.Adjust the position of the camera lens of the BlackView.
Ensure that it is level with the ground.

7.Start the engine. Check whether the BlackView is installed

- When the BlackVue is installed correctly, its Intelligent voice systems will play“The BlackView has been starting normal recording”.

Using the BlackView

Using the Normal Recording Function

- Start the engine.
- BlackView turns on and starts the Normal Recording function. After it is turned on, it will records and saves scenes at each specified period.
- Stop the engine.
- BlackView will turn off after about 5 seconds.

Using the Manual Reconrding Function

- Press the <Switching> button on the BlackView.
- After BlackView turns on.Press the <Camera> button to starts the Manual Recording function. It will record and saves scenes at each specified period.
- Press the <Camera> button again.BlackView will exit Manual Recording function.

Using the Camera Function

- When BlackView turns on.
- To enter the Camera Function Press the <Camera> button.
- Press the <Camera> button again.BlackView will take photograph.

Using the Playback Function

- When BlackView turns on.
- Press and hold <Play> button for 2 seconds to enter the Playback Function.
- Press <Camera> or <Vedio>button to select the video or photo which you want,Then Press <Play> button to play.
- Press and hold <Play> button for 2 seconds again. The BlackView will exit the Playback Function.

Setting the BlackView

Setting video output

Video output including【Size】【EV】【White Balance】【Video Time】【Night Mode】

1.Setting 【Size】

- When System is turned on.Press <Switching> button to display video output page.
- Press <Camera> or <Vedio> button to select【Size】,Then Press <Play> button to display Sub-page.
- Sub-page including【VGA】【QVGA】【D1】【HD】,Press <Camera> or <Vedio>button to select the setting which you want,Then Press <Play> button to confirm.

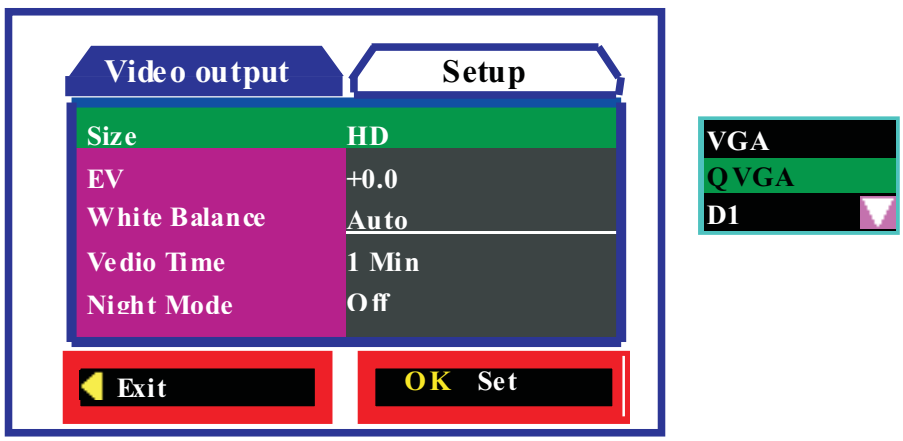

2.Setting 【EV】

- When System is turned on.Press < Switching > button to display video output page.
- Press <Camera> or <Vedio> button to select【EV】,Then Press <Play> button to display Sub-page.
- Sub-page including【+2.0】【+5/3】【+4/3】【+1.0】【+2/3】【+1/3】【+0.0】【-1/3】【-2/3】【-1.0】【-4/3】【-5/3】【-2.0】,Press <Camera> or <Vedio> button to select the setting which you want,Then Press <Play> button to confirm.

Setting the BlackView

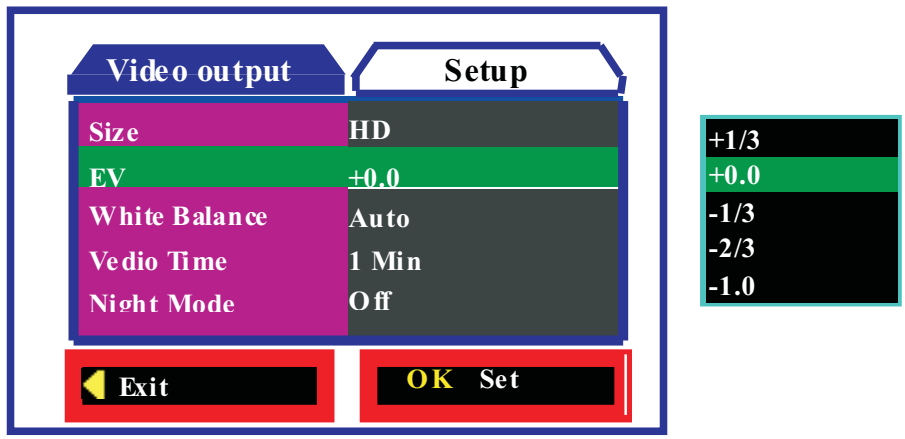

3.Setting 【White Blance】

- When System is turned on.Press < Switching > button to display video output page.
- Press <Camera> or <Vedio> button to select【White Blance】,Then Press <Play> button to display Sub-page.
- Sub-page including【Auto】【Daylight】【Cloudy】【Tungsten】【Fluorescent】,Press <Camera> or <Vedio> button to select the setting which you want,Then Press <Play> button to confirm.

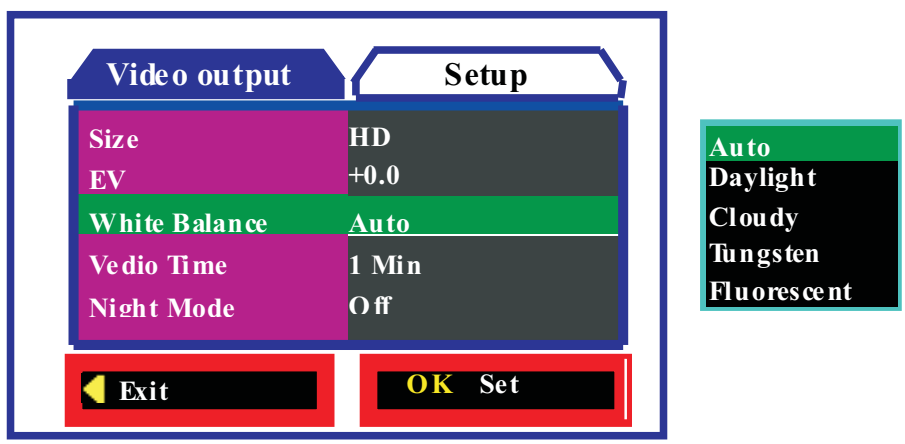

Setting the BlackView

4.Setting【Vedio Time】

- When System is turned on.Press < Switching > button to display video output page.
- Press <Camera> or <Vedio> button to select【Night Mode】,Then Press <Play> button to display Sub-page.
- Sub-page including【Off】【On】,Press <Camera> or <Vedio> button to select the setting which you want,Then Press <Play> button to confirm.

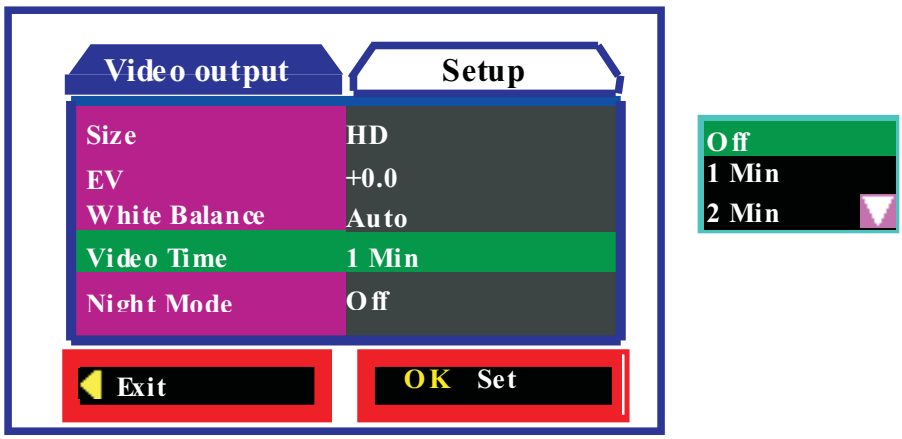

5.Setting【Night Mode】

- When System is turned on.Press < Switching > button to display video output page.
- Press <Camera> or <Vedio> button to select【Night Mode】,Then Press <Play> button to display Sub-page.
- Sub-page including【Off】【On】,Press <Camera> or <Vedio> button to select the setting which you want,Then Press <Play> button to confirm.

Setting the BlackView

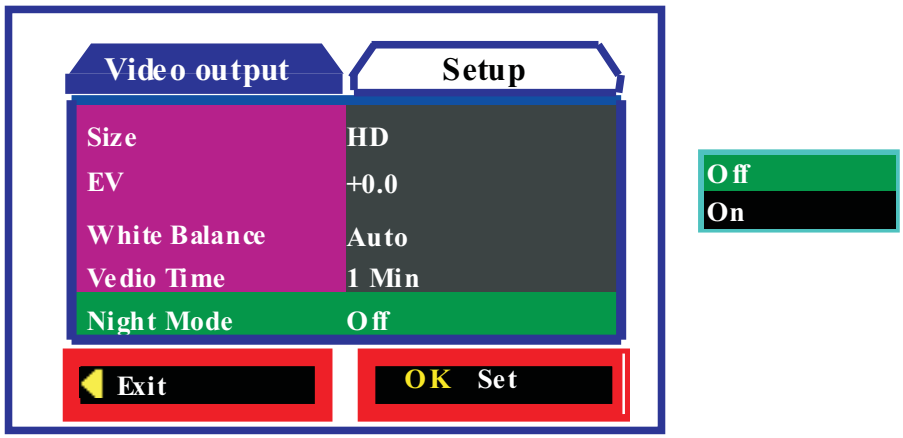

Setting Setup

Setup including【Format】【beep】【language】【auto off】【sys.reset】【Light Freq.】【USB】【Screen Set】

1.Setting 【Format】

- When System is turned on.Double click<Switching> button to display Setup page.
- Press <Camera> or <Vedio> button to select【Format】,Then Press <Play> button to display subpage.
- Subpage including【Cancel】【Execute】,Press <Camera> or <Vedio> button to select the setting which you want,Then Press <Play> button to confirm.

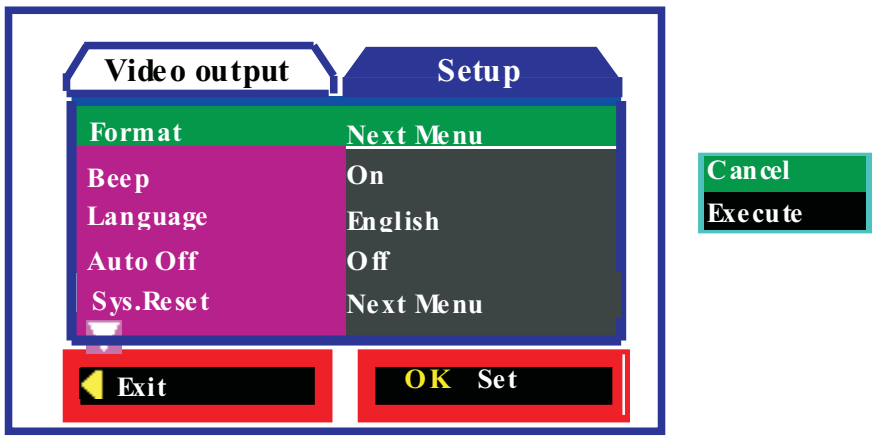

Setting the BlackView

2.Setting 【Beep】

- When System is turned on.Double click<Switching> button to display Setup page.
- Press <Camera> or <Vedio> button to select【Beep】,Then Press <Play> button to display subpage.
- Subpage including【On】【Off】,Press <Camera> or <Vedio> button to select the setting which you want,Then Press <Play> button to confirm.

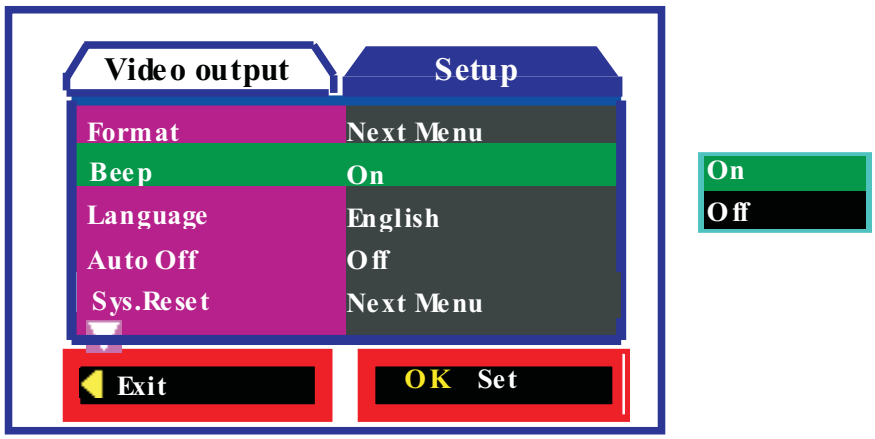

3.Setting 【Language】

- When System is turned on.Double click<Switching> button to display Setup page.
- Press <Camera> or <Vedio> button to select【Language】,Then Press <Play> button to display subpage.
- Subpage including【English】【繁體中文】【简体中文】【日本語】【Русский】,Press <Camera> or <Vedio> button to select setting which you want,Then Press <Play> button to confirm.

Setting the BlackView

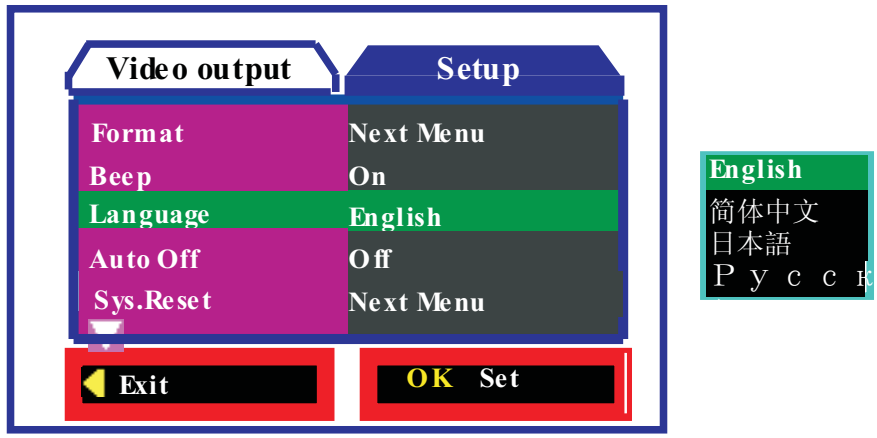

4.Setting 【Auto Off】

- When System is turned on.Double click<Switching> button to display Setup page.
- Press <Camera> or <Vedio> button to select【Auto Off】,Then Press <Play> button to display subpage.
- Subpage including【1 Min】【3 Min】【5 Min】【Off】,Press <Camera> or <Vedio> button to select the setting which you want,Then Press <Play> button to confirm.

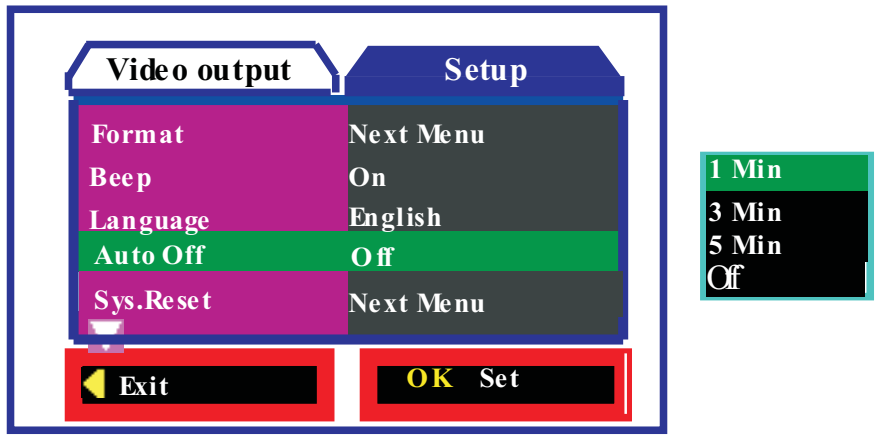

Setting the BlackView

5.Setting 【Sys.Reset】

- When System is turned on.Double click<Switching> button to display Setup page.
- Press <Camera> or <Vedio> button to select【Sys.Reset】,Then Press <Play> button to display subpage.
- Subpage including【Cancel】【Execute】,Press <Camera> or <Vedio> button to select the setting which you want,Then Press <Play> button to confirm.

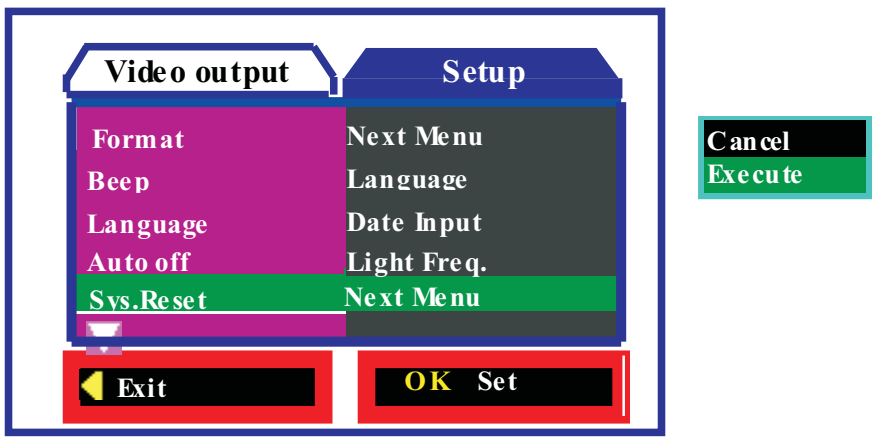

6.Setting 【Light Fre.】

- When System is turned on.Double click<Switching> button to display Setup page.
- Press <Camera> or <Vedio> button to select【Light Fre.】,Then Press <Play> button to display subpage.
- Subpage including【60Hz】【50Hz】,Press <Camera> or <Vedio> button to select the setting which you want,Then Press <Play> button to confirm.

Setting the BlackView

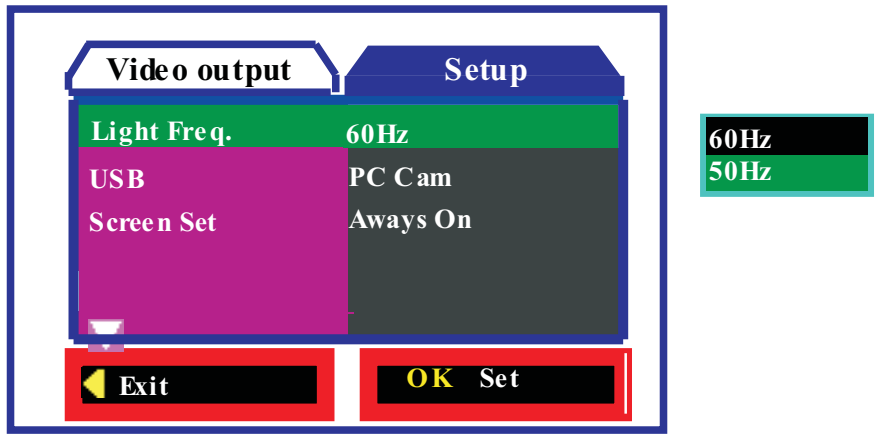

7.Setting 【USB】

- When System is turned on.Double click<Switching> button to display Setup page.
- Press <Camera> or <Vedio> button to select【Light Fre.】,Then Press <Play> button to display subpage.
- Subpage including【60Hz】【50Hz】,Press <Camera> or <Vedio> button to select the setting which you want,Then Press <Play> button to confirm.

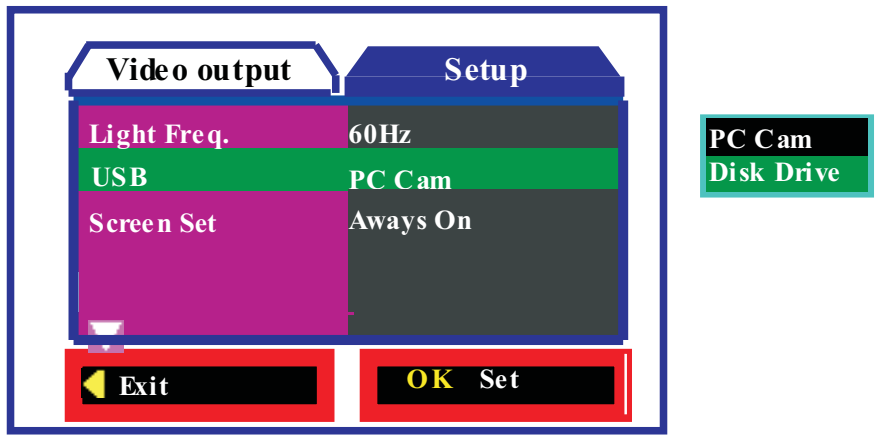

8.Setting 【Screen Set】

- When System is turned on.Double click<Switching> button to display Setup page.
- Press <Camera> or <Vedio> button to select【Screen Set】,Then Press <Play> button to display subpage.
- Subpage including【Always On】【1 Min】【3 Min】,Press <Camera> or <Vedio> button to select the setting which you want,Then Press <Play> button to confirm.

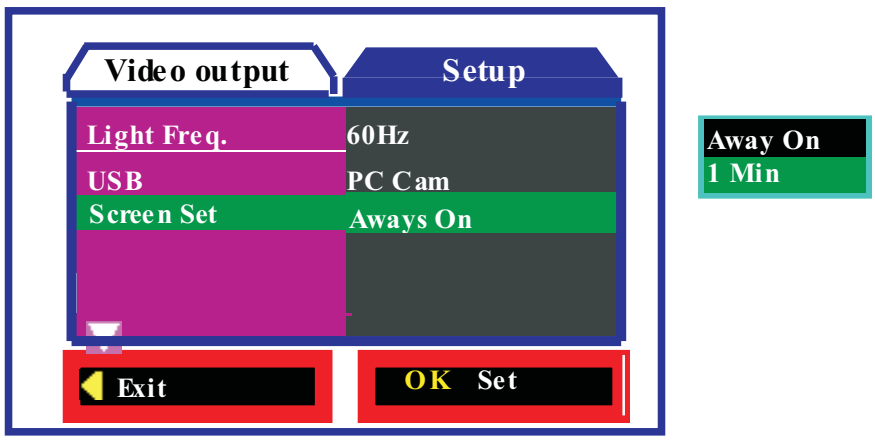

Ballasoft